



Rec'd PCT/PTO 20 MAY 2005
PCT/GB 2003 / 0 0 5 5 3 8; #2



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 23 FEB 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 12 February 2004

BEST AVAILABLE COPY

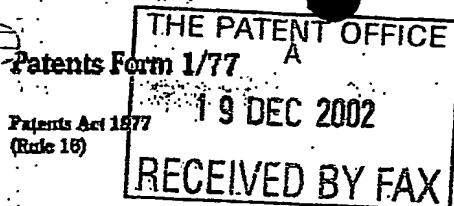

Patents Act 1977
(Rule 16)



19DEC02 E771952-1 002651
P01/7700 0.00-0229459.3

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

1. Your reference

582GB

2. Patent application number

(The Patent Office will fill in this part)

0229459.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Renishaw plc
New Mills
Wotton-under-Edge
Gloucestershire GL12 8JR

Patents ADP number (if you know it)

2691002 ✓

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Tool Analysis Device And Method

5. Name of your agent (if you have one)

R D Cavill et al

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Renishaw plc
Patent Department
New Mills
Wotton-under-Edge
Gloucestershire
GL12 8JR

Patents ADP number (if you know it)

790865000.1

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.
See note (4))

Yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form	0
Description	12 ✓
Claim(s)	0
Abstract	0
Drawing(s)	8 <i>only</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	0
Request for preliminary examination and search (Patents Form 8/77)	0
Request for substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	0

11.

I/We request the grant of a patent on the basis of this application.

Signature *C. J. Smith*

Date 19.12.02

AGENT FOR THE APPLICANT

12. Name and daytime telephone number of person to contact in the United Kingdom

A ILES 01453 524524

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

1

TOOL ANALYSIS DEVICE AND METHOD

This invention relates to a device and method usable for analysis of a tool during its use with a machine tool, in particular but not exclusively for determination of the position of a tool.

- Toolsetting devices for determining the position of a tool, which use a break beam system are known.
- 10 EP1050368 A1 describes in detail one system which has a light transmitter and receiver. The transmitter produces a beam of light and a receiver has circuitry which produces a signal when obstruction of the beam is detected. When a predetermined level of beam
- 15 obstruction e.g. 50% is reached then the signal strength from the receiver is reduced such that a trigger is produced. The trigger occurs when a tool is present in the beam path.
- 20 A toothed cutting tool has to be rotated in order to find its cutting diameter. Usually it will have at least two teeth, one of which may be taller than the other and so that tooth will circumscribe a larger diameter than the other(s). When the tool is brought
- 25 into the beam path the tallest tooth may be at any point and so the repeatability of the trigger will vary. For example if a tool rotating at 1500rpm is moving towards the beam at 6mm per minute then the feed per revolution would be $6 \div 1500$ which equals 0.004mm.
- 30 So, the repeatability of the trigger will be no better than 4 microns because the largest tooth may break the beam anywhere in that feed per revolution distance. The feed per revolution of the measurement limits the speed at which the tool can be driven into the beam and

so slows the detection rate. Detection speed needs to be maximised for quick operation of the machine tool, whilst repeatability needs to be maximised also, requiring slow feed rates.

5

One known way to increase detection speed is to move the tool quickly toward the tool setting device and once detected to back off and then move in slowly to determine the tool's position. This procedure, whilst saving some time, is still relatively time consuming.

10

According to a first aspect the present invention provides a tool analysis device for use on a machine tool comprising a light emitter and a light receiver, the light receiver in use receiving light from the emitter and producing a signal indicative of the amount of light being received, wherein the device further comprises a converter for providing data having a numerical representation of the signal produced by the receiver and comprising also a processor for processing that data and for producing an output when the data conforms to a predetermined condition.

15

20

The processor may be a digital signal processor (DSP) operative to process the data according to an algorithm.

25

According to a second aspect the invention provides a method for processing an analogue signal resulting from light falling on a light receiver of a tool analysis device for use on a machine tool, comprising the steps of:

30

converting the analogue signal into data having a numerical form which represents the signal; and

3.

processing the data according to an algorithm.

Preferably the method provides a further step of:

5 producing an output signal when instructed by the algorithm when the data conforms to a predetermined condition.

Preferably the method employs a DSP to process the data and the algorithm is executed within the DSP.

10

According to both aspects the predetermined condition may be the data obtained when the light falling on the light receiver is altered e.g. in such a way that the tooth of a tool momentarily moves into and then out of the light falling in the light receiver, or a series of such events that conform to a predetermined pattern. The pattern could be deviations in the amount of that light such or a definable change in the magnitude of those deviations, e.g. a decrease in magnitude from one deviation to the next or a maximum followed by a minimum followed by another maximum in that magnitude.

20

Embodiments of the invention will now be described in detail with reference to the drawings, wherein:

25

Fig 1 shows a break beam type tool detector and associated components;

Fig 2 shows a schematic representation of elements of the break beam tool detector shown in Fig 1;

Fig 3 shows a flow diagram of an algorithm for use with the invention;

30

Figs 4,5,7 and 8 show simplified graphical representations of signals produced during use of the detector shown in Fig 1; and

Figs 9-14 show graphs of actual output of a light

receiver versus time obtained during use of a detector of the type shown in Fig 1.

Fig 1 shows a break beam type tool detector 5. The detector is suitable for use on a computer controlled machine tool (usually called a CNC) having a machine controller 56, a tool 50, a toolholder 52 and possibly an automatic tool changer 54.

10 The tool detector 5 includes a laser light transmitter 12 (IR light is used in this instance), at transmitter portion 10, a light receiver 34 at receiver portion 30 and a base 40 for mounting the transmitter and receiver portions. A light beam 20 is created in use which can
15 be obstructed by the tool 50. Additional circuitry 32 is used also for processing the signal issued by the light receiver 34. Whilst the circuitry is shown in the receiver portion 30 some or all of it may be located off the detector, e.g. as a PC interface card.

20 Fig 2 shows the circuit 32 in more detail. A photodiode is used as the light detector 34. The analogue signal from the photodiode is amplified at amplifier 31 and is then sampled by an analogue to digital converter (A-D) 33. The sample rate is
25 approximately 45KHz, but need not be that value. A sample is called for by the digital signal processor (DSP) and this processor runs a continuously looping algorithm which calls for a sample at each loop. The DSP is capable of parallel processing and so performs
30 its tasks very quickly. The algorithm used performs the steps illustrated in Fig 3 and can be reset. In practice background noise will be present and this will be sampled by the DSP. As the beam is obstructed e.g. by the tool, the signal from the receiver 34 will

5

change and thus will, in turn be sampled also. The algorithm can cause an output when the data conforms to a predetermined condition.

5 Prior to tool detection a calibration pin is detected by the detector. A pin similar in size to the tool to be detected is brought into the beam 20 by a program running in the CNC at a feed rate of approximately 4mm/sec. The pin may be rotating or non-rotating. The
10 light receiver output will follow a curve similar to that shown in Fig 4. That graph shows the receiver output in volts V, versus time. A straight line n represents the nominal upper voltage of the receiver output with no beam obstruction. As the pin is brought
15 into the beam an oscillation in output V is observed due to diffraction, then as less and less light from the beam falls on the receiver the voltage reduces along curve c and eventually drops to zero. In particular a noticeable increase p in voltage is
20 observed as the beam begins to be obstructed. The voltage during this calibration is processed by the DSP and turned into digital information representing the analogue output of the light receiver 34. The curve is stored as a digital representation in the memory of the
25 DSP and is referred to below as the calibration curve c. More than one curve can be stored.

When the tool 50 is brought into the beam at about the same feed rate as the pin, whilst it is rotating, it
30 will have teeth which temporarily obscure a part of the beam and these teeth cause voltage deviations s in the signal from the receiver 34 as shown in Fig 5.

It has been found that the minima and maxima of the

deviations shown in Fig 5 lie approximately on the calibration curve c. The graph shown in Fig 5 is of an idealised form, and in practice far more interference or noise is observed than has been shown. However, the voltage deviations shown will be present despite the noise. For simplicity few deviations are shown, however, in practice there may be many more than has been shown because the tool will be rotating much faster than is exemplified and consequently many more interruptions to the beam will be observed. These additional deviations will also have minima and maxima which lie approximately on the calibration curve c.

The deviations present will differ in shape depending on the tool type but the minima and maxima will still lie on the calibration curve c.

Another set of deviations is shown in Fig 6. This graph illustrates the voltage deviations obtained when a two tooth cutting tool having one tooth taller than the other is brought into the beam. In this instance two sets of voltage deviations s and s' are formed, s' lagging behind s. Each of these sets s and s' has minima and maxima which lie on one of the respective calibration curves c or c'.

Yet another set of deviations is shown in Fig 7. As well as the deviations s this graph illustrates coolant drips etc d which occur when the beam is obscured by material like machine coolant or swarf. These spurious signals d do not conform to any pattern or curve and occur randomly.

In each of the graphs of Figs 5, 6 and 7 when background

noise and spurious signals d are ignored in favour of a recognisable set of voltage deviations s which are processed by the DSP.

5 Now, in this embodiment of the invention the voltage signals from the light receiver are conditioned using the circuitry shown schematically in Fig 2. Signal amplifier 31 amplifies the analogue signal and passes it to the A-D 33. The A-D in this example can operate at a 96KHz sample rate but as illustrated in Fig 3 is driven to collect each sample by the downstream DSP 35. Once processed the sampled signals can be used e.g. to activate an output in the form of a trigger switch 37 e.g. to indicate that the edge of the tool has been found.

In this example the predetermined condition is the data obtained when the beam is obstructed by the tool.

20 The processing of the digitised signal by the DSP can be carried out in a number of ways. The DSP is an ideal device for carrying out such processing because it is very fast and processes the data in real time, thus enabling short response times.

25 One method of processing the sampled data involves deriving a polynomial e.g. cubic expression for the calibration curve c shown in Fig 4 and fitting, within tolerances, the minima and the maxima of the voltage deviations s obtained in use of the device to that curve. If four (in this instance) minima and maxima values have been identified which fit to the curve within a predetermined time period then the DSP sends a trigger signal to switch 37 so that a 24v skip signal

can be issued to the machine controller 56. The machine controller can use this signal to determine the position of the tool's edges and thereby its effective cutting path.

5

Alternatively an approximate straight line or polynomial can be generated using the minima as points on that line. No calibration curve(s) is (are) required but rather, a threshold value can be predetermined and when the straight line or polynomial line is calculated to have crossed (or will cross when extrapolated) that threshold then a trigger signal can be generated. The calculations necessary for the line generation again can be performed in the DSP. The accuracy of the estimated threshold crossing point can be improved if more than the minimum number of points are used. The gradient method can be used to determine minima or maxima and hence determine a threshold value. The increase p can be used also to predict a threshold crossing if required.

Drips or similar obstructions to the beam may give rise to false readings during the use of the technique mentioned immediately above. There are a number of ways in which these false readings can be ignored. One such way is to look for periodic voltage deviations from the receiver 34 and then to open time windows around the time when another deviation is expected. Only in this window will digitising of the signal take place. Thus, the chance of a drip occurring within that window will be relatively small.

Another way to reject drips etc is to reject any voltage deviation minima or maxima whose values lie

9
outside a band within which the next successive value for a predetermined curve would be expected.

5 The above examples for processing of sampled data can be used for non-rotating or rotating tool detection including the detection of the lengths of rotating drills etc which, when brought into the beam on axis appear to be non-rotating.

10 Another method of processing the sampled data from the edge of a rotating tool is to look for voltage deviations which have a distinctive character. A detail of one such voltage deviation is shown in Fig. 6. For certain signals, the deviation of the voltage when a
15 cutting tool tooth obstructs the beam has a distinct shape caused by diffraction effects. The shape occurs only when a rotating part enters and leaves the beam. This distinctive shape can be detected by operating an algorithm in the DSP. This algorithm will look for the
20 relatively high amplitude maximum followed by a relatively high amplitude minimum s followed by another relatively high amplitude maximum h. The minimum of that deviation and the minimum of subsequent similar deviations can be identified as tooth edge deviations
25 and can thus be used to form a curve which can be fitted to a polynomial. No calibration curve(s) is (are) required for this method.

30 The characteristic shape mentioned above may be a min-max-min as well as the max-min-max described.

A method of rejecting drips when detecting rotating tools is to ignore voltage deviations which do not have the expected distinctive character i.e. either min-max-

min or max-min-max e.g. as shown in Fig 8.

The techniques mentioned above for determining the position of a tool rely on the calculation of the minima and maxima of the voltage deviations which occur when a tooth obstructs the beam. There are a number of well-known techniques for estimating the zero slope part of a curve from points on either side of minima or maxima which may be used.

Fig 9 shows a graph of actual signals sampled from the output of a tool detector of the type shown in Fig 1. In this graph one square along the V axis represents 1 volt and one square along the time axis represents approximately 25msec.

A calibration pin has been brought into the beam and has caused the characteristic curve c which is shown in Fig 4 in simplified form. The nominal voltage n is 5.5v and the receiver voltage drops to zero when fully obstructed.

Fig 10 shows a graph of actual signals sampled from the output of a tool detector. In this graph a rotating tool (a 12mm slot drill) is brought into the detector beam and its teeth have produced the signal as they obstruct the beam. The graph squares represent 1 volt and about 120msec. Superimposed on the graph is the curve c which approximates to the curve c in Fig 9.

Various typical shapes of the data plots at points F11 to F14 along the curve are shown in more detail in Figs 11 to 14 respectively. In each of the graphs shown in Figs 11-14 one square represents 0.5v and about 5msec.

11

In Fig 12 the obstruction signal is still in its oscillatory phase and has a min-max-min shape. In Fig 12 a trough develops in the max and thus a min,max,min,max,min shape develops. In Fig 13 that middle trough becomes bigger. At Fig 14 the trough is larger than the other signals. The signal in Fig 14 is the max-min-max signal referred to above which has the distinctive shape that can be recognised and can be distinguished from other spurious signals.

10

Thus it can be seen that the voltage deviation that is detected by the algorithm in the DSP develops as the tool is progressed into the beam. As mentioned above, there are many ways in which the sampled data can be used to determine a trigger point.

15

A DSP has been utilised in the embodiment described, however many alternatives exist. Processing of the digitised signal could be carried out using e.g. a Field-Programmable Gate Array, an application-specific integrated circuit or a general-purpose microprocessor e.g. a PIC or a PC based system.

20

The tool detector is shown as a break beam type, but could be a reflective type.

25

Any edge of a tool can be detected e.g. side or end. Usually a calibration curve will be generated for each edge which is to be detected, but such a curve is not essential for edge detection.

30


The graphs show generally voltage output of a light receiver but any other variable can be employed. The voltage etc may not drop fully to zero, particularly if

a very small tool is to be detected and where only a portion of the beam is obstructed.

- Detection can be made when the tool is coming out of the beam as well as going into the beam. In such circumstances the effects detailed above will be reversed. Tools or other items to be detected need not be rotating to be detected.
- 10 As described above the minima or maxima of voltage deviations or deviations of variables can be fitted to a curve or simply used to plot a line. In either instance a trigger point equivalent to a voltage (etc) threshold can be set.

1/8

Fig 1

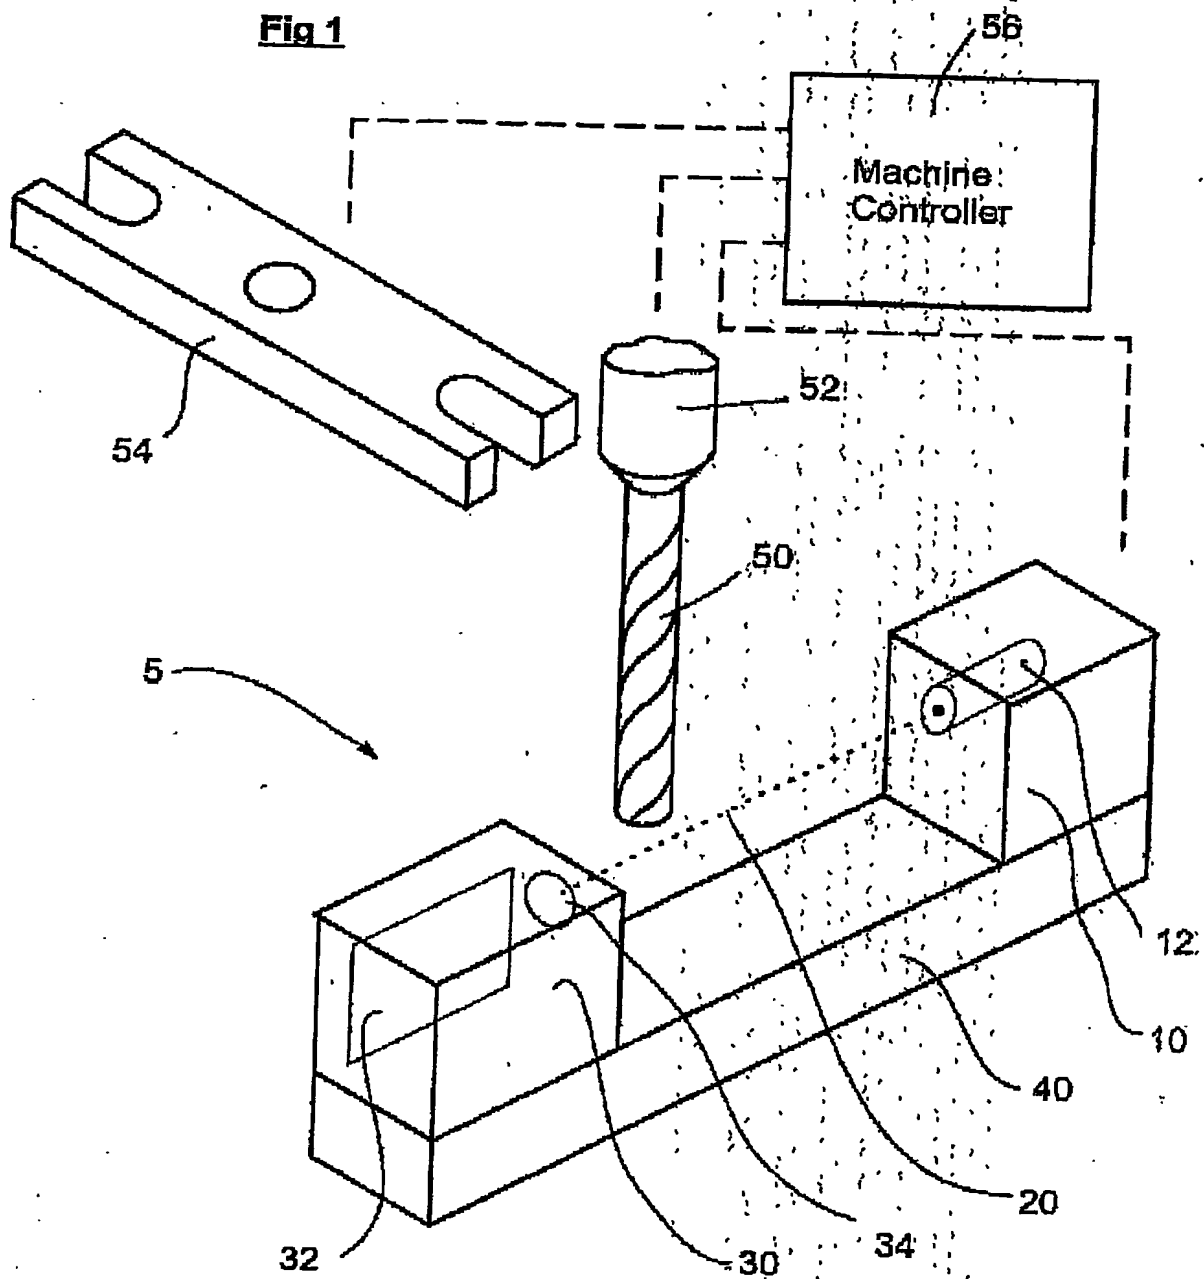

2/8

32




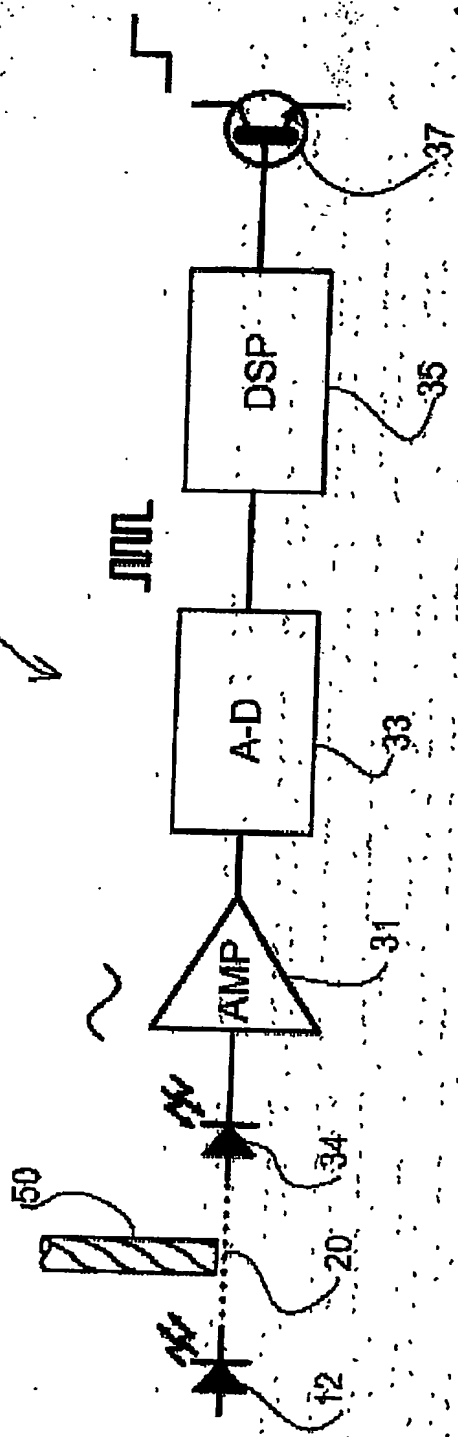


Fig 2

3/8

**Fig 3**

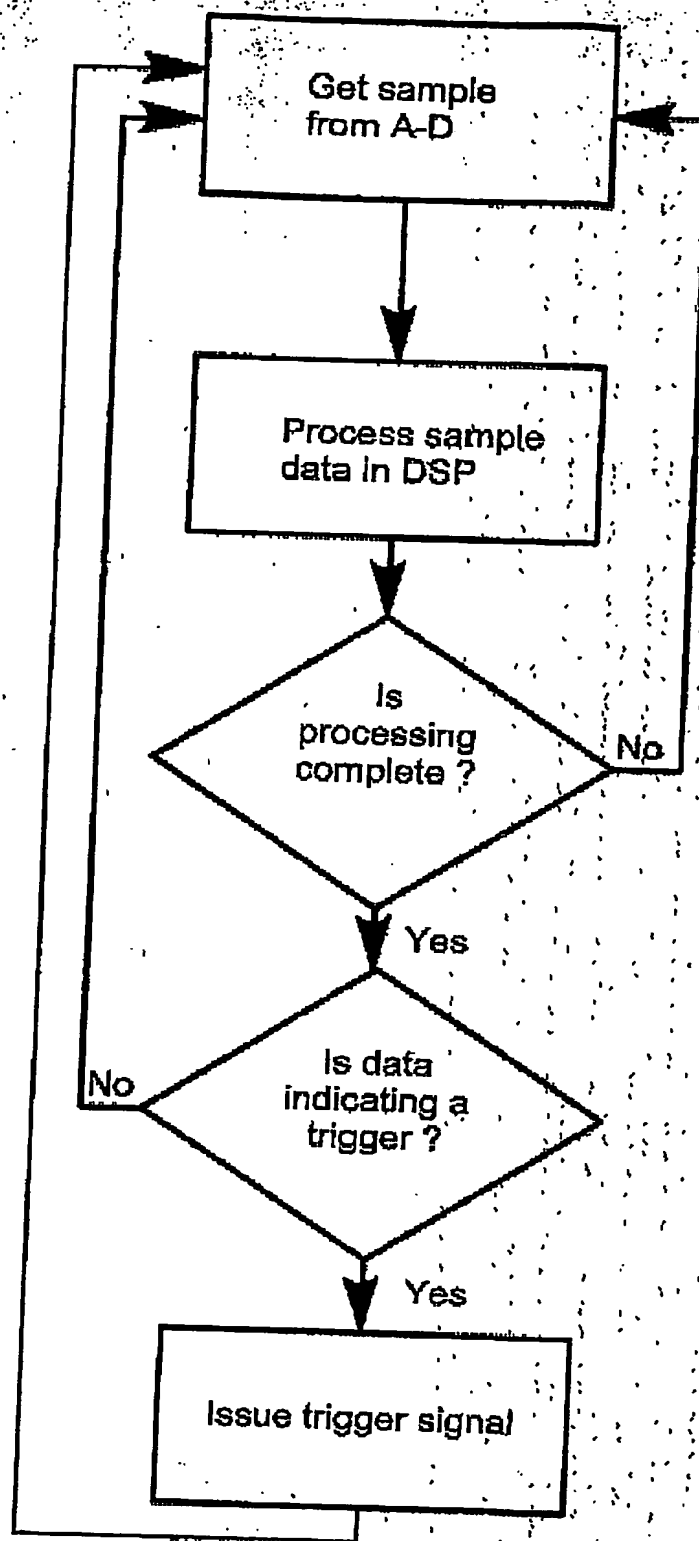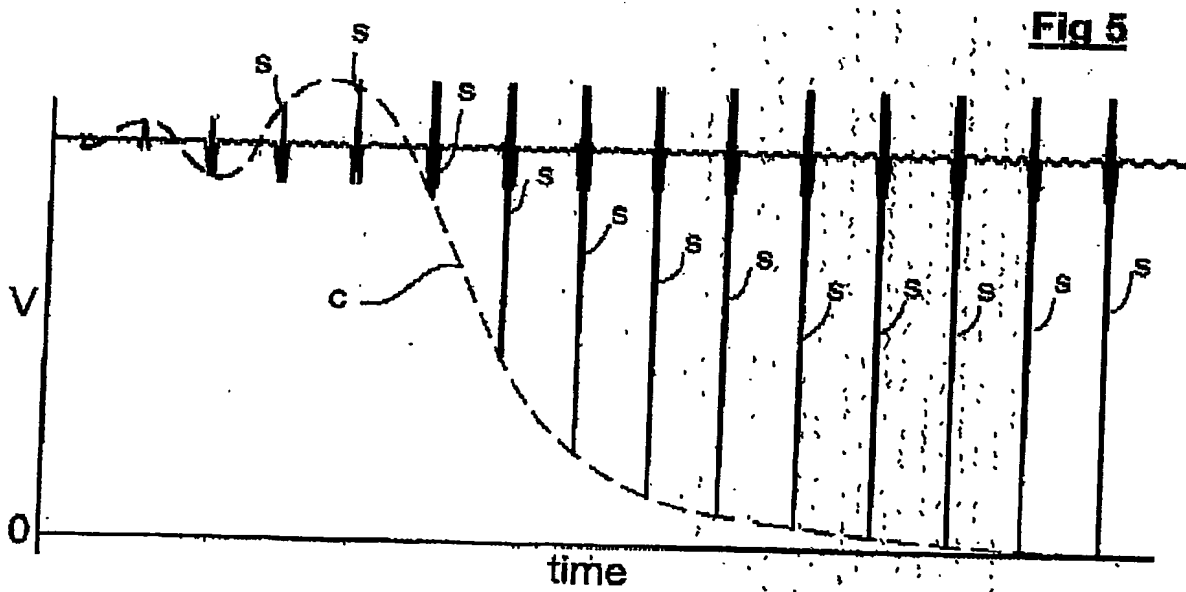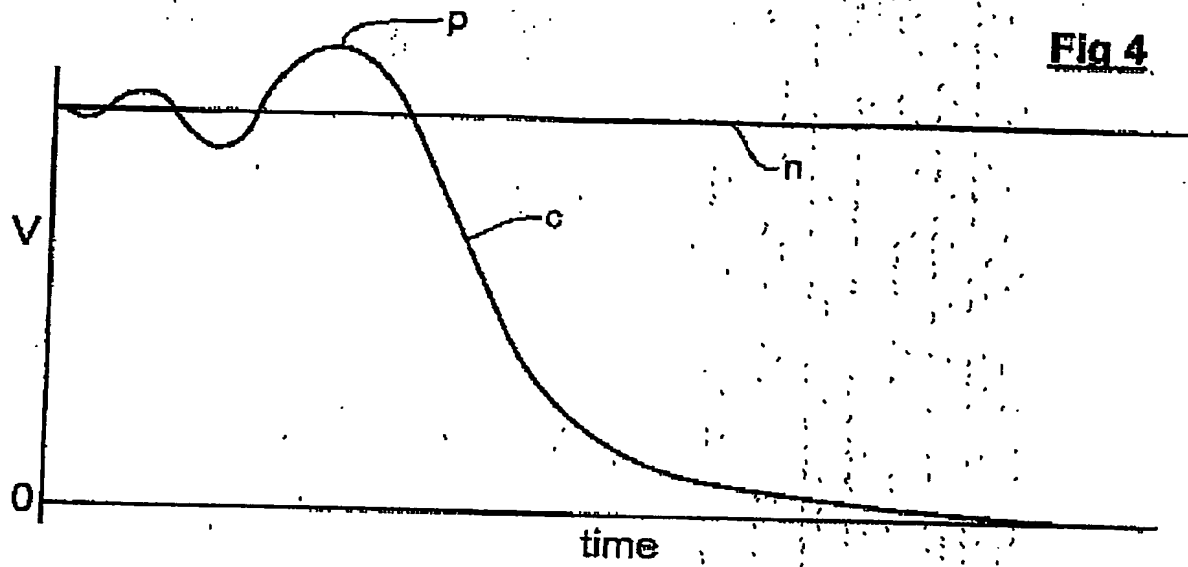

5/8

Fig 6


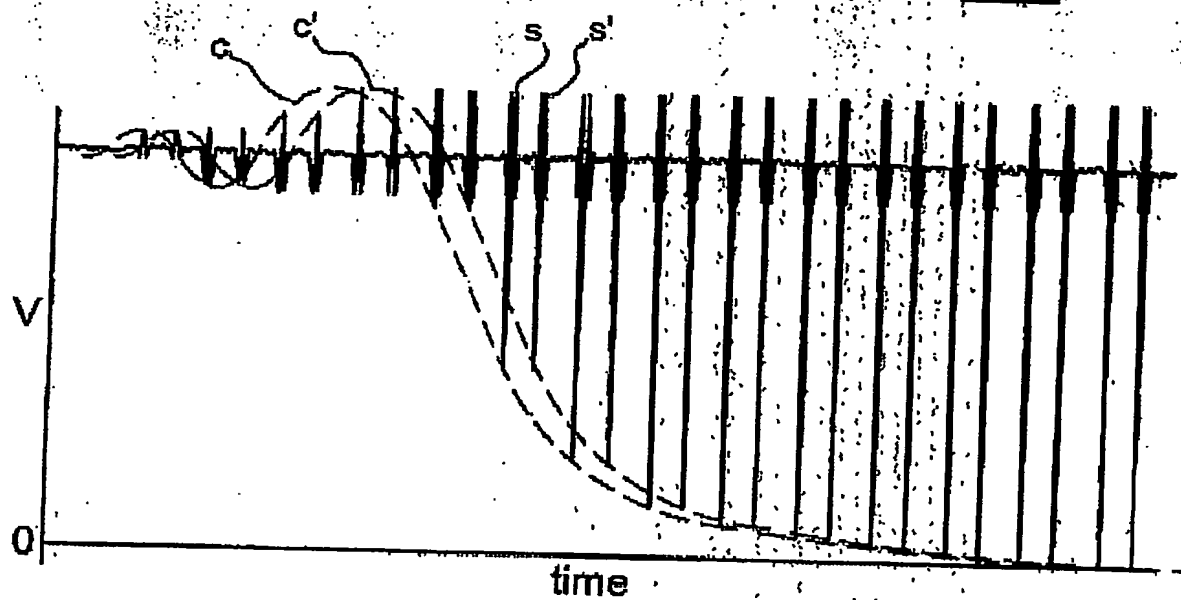


Fig 7

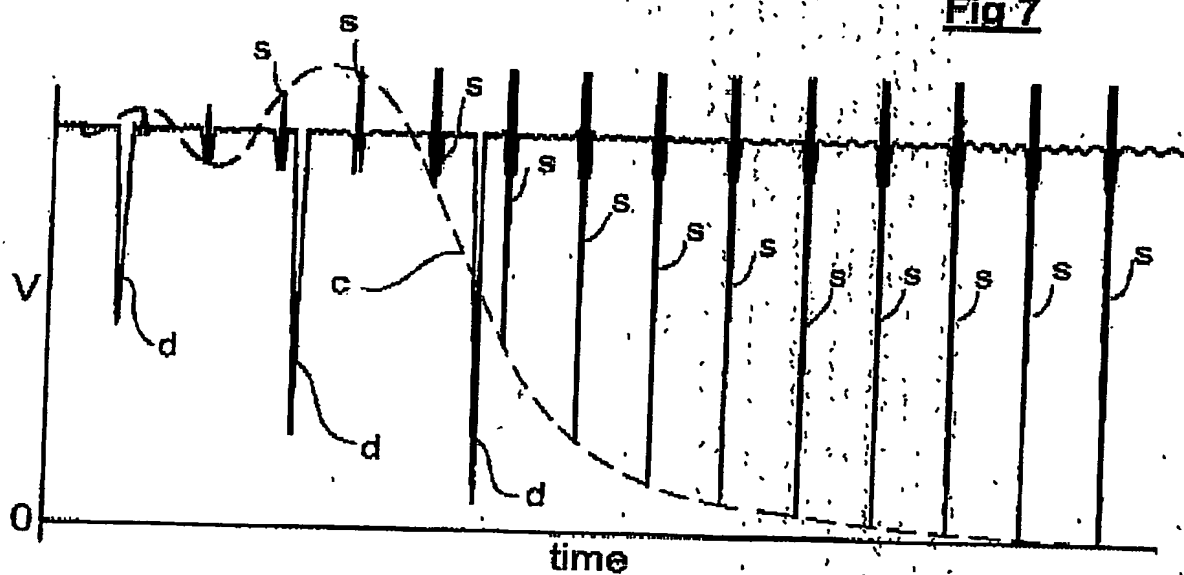

6/8

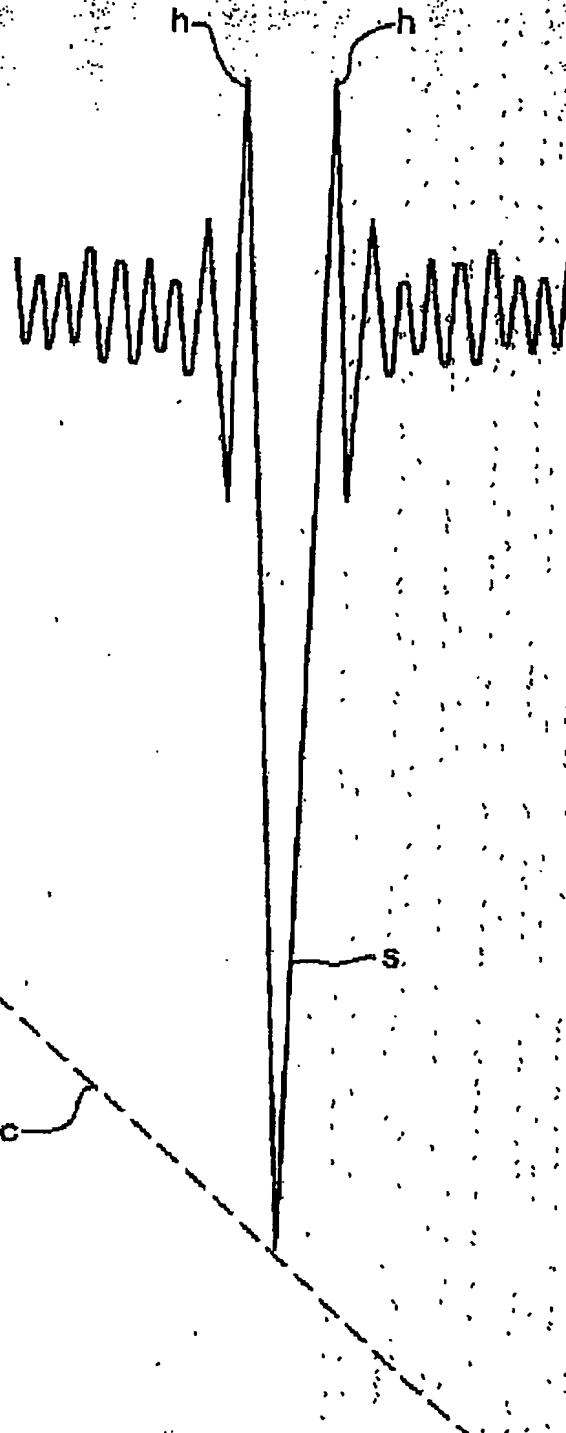


Fig 8

7/8

Fig 9






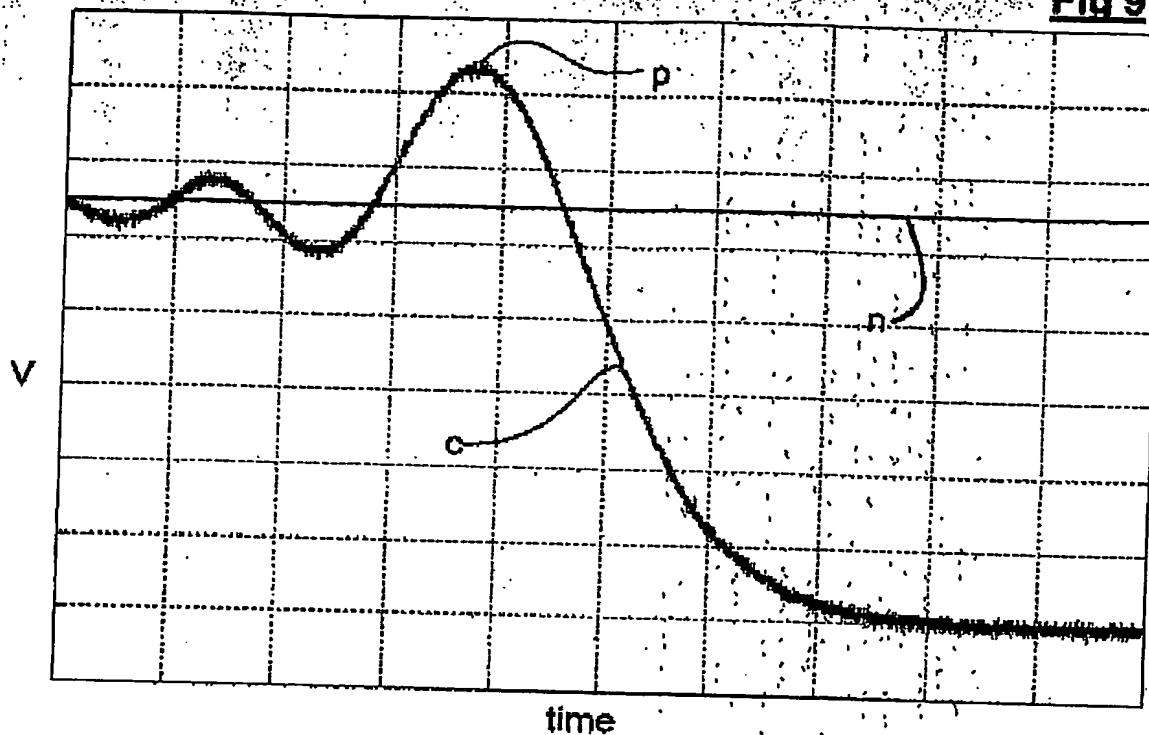


Fig 10

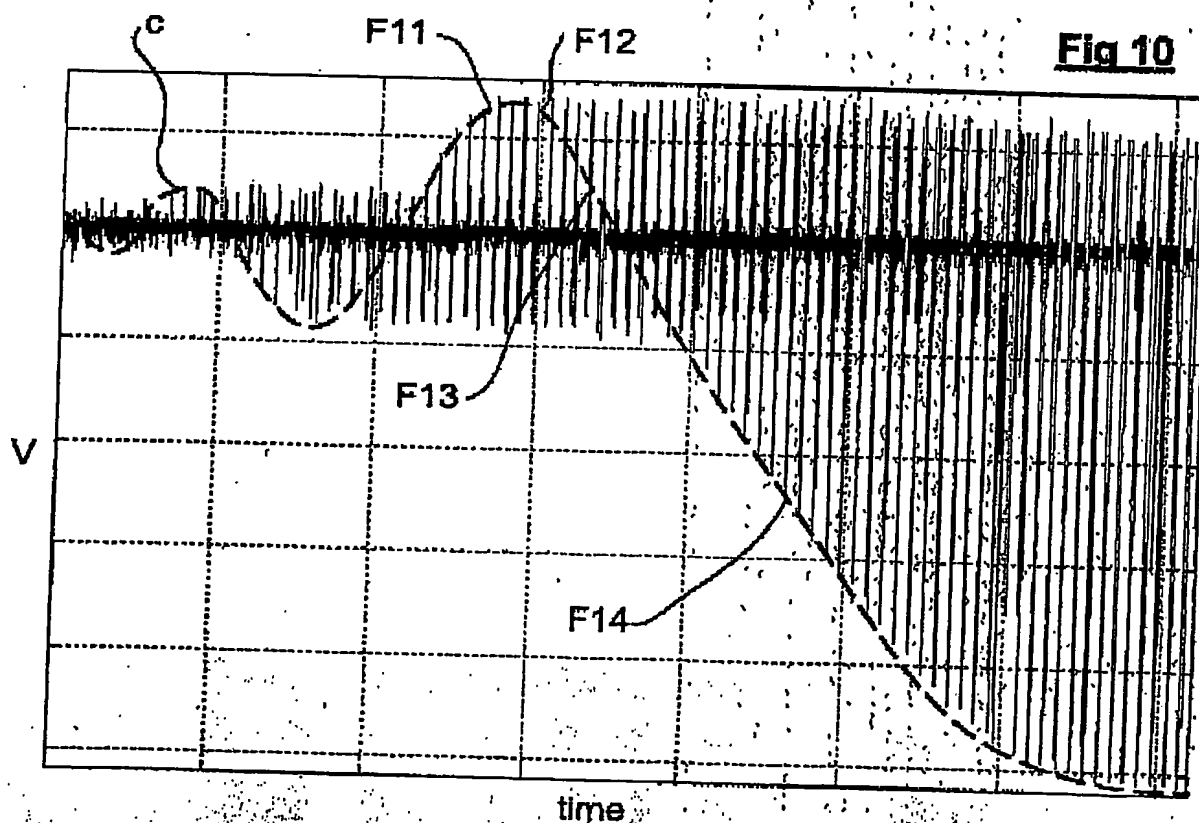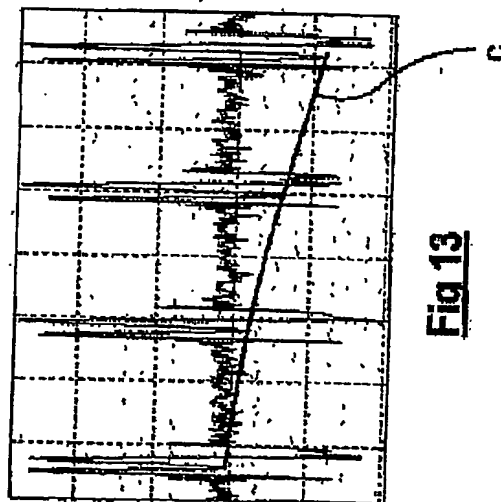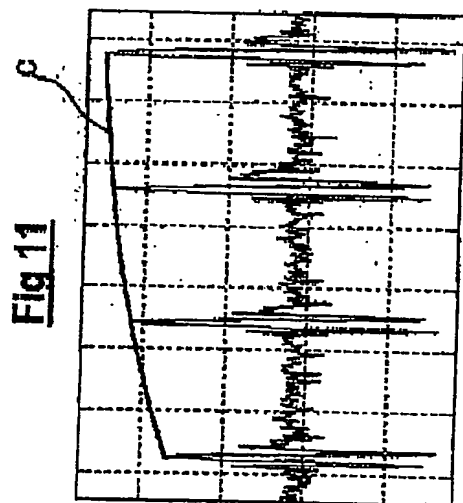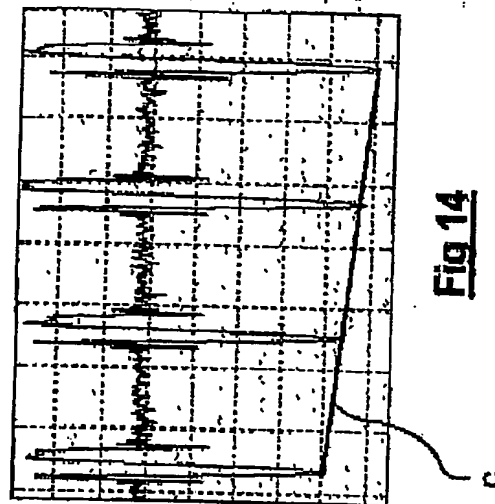

8/8

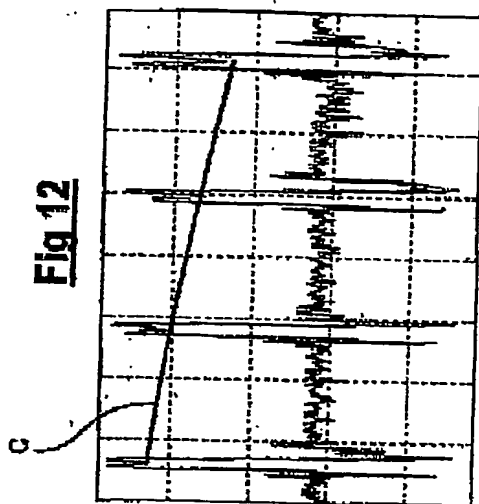

THE PATENT OFFICE
12 FEB 2004
Received in Patent
International Unit

PCT Application
PCT/GB2003/005538



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.